



BEFORE



AFTER



THE SMART CHOICE FOR PAVEMENT PRESERVATION

ASK ABOUT
**LIQUID ROAD
ULTRA
BLEND**
FACTORY BLENDED
WITH SAND ADDED



LIQUID ROAD®


ASPHALT BASED PAVEMENT COATING

THE ULTIMATE COATING FOR ROADS, STREETS, & OTHER PAVEMENT SURFACES

Advantages:

- Polymer modified and fiber reinforced for ultimate durability
- A tough, durable aggregate-filled bituminous coating provides skid resistance and lasting protection

UNCOATED VS. COATED

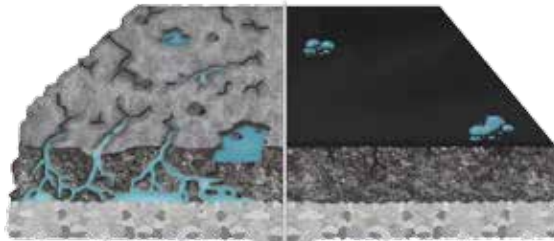

Liquid Road is mixed with specially graded aggregate and applied to the road surface. The result is a highly durable, slip-resistant surface treatment that greatly extends pavement service life. Liquid Road is cost-effective and easy to apply with minimal impact on traffic flow.

Liquid Road Uses:

- Low Traffic Roads
- Parking Lots
- Neighborhoods
- Airport Taxiways
- Gated Communities
- Highway Shoulders

MIXING PROCEDURES:

[Based on 100 gallons of Liquid Road]

- Liquid Road..... 100 gallons
- Sand.....400 lbs.

A 20-30 mesh AFS sand is recommended for parking lot applications. An 11-15 mesh AFS sand is recommended for road applications.

NOTE: A small amount of water may be added to facilitate application.

MATERIAL REQUIREMENTS: For parking lot application [20-30 mesh sand] - 55-66 square feet [6.11-7.33 square yards] per gallon per coat.

For road application [11-15 mesh sand] - 36-45 square feet [4-5 square yards] per gallon per coat.

PRODUCT #	DESCRIPTION	WEIGHT	PRICE
S1045P	5 - Gallon Pail	53 lbs.	\$ 39.99
S1045D	55 - Gallon Drum	580 lbs.	\$ 365.99
S1045B	Bulk	-	- quoted -