 FORMULATED TO PROTECT & BEAUTIFY ASPHALT PAVEMENT

ASK ABOUT
**MASTERSEAL
ULTRA
BLEND**
FACTORY BLENDED
WITH WATER,
POLYMER ADDITIVE
AND SAND



MASTERSEAL™
ASPHALT BASED PAVEMENT SEALER

THE SMART CHOICE FOR PAVEMENT MAINTENANCE

Advantages:

- User friendly - no irritating fumes
- Deep, rich black color
- More flexible - won't check crack

MasterSeal Uses:

- Parking Lots
- Driveways
- Low-Traffic Roads
- Low-Speed Roads
- Airports
- Shopping Malls
- Highway Shoulders

MIXING PROCEDURES:

(Based on 100 gallons of MasterSeal Concentrate)


MasterSeal Concentrate.....	100 gallons
Water	15 - 25 gallons
Top Tuff Polymer Additive.....	1/2 - 2 gallons
Sand (40-70 mesh AFS).....	200-500 lbs.

NOTE: Mix thoroughly in agitated tank and apply by squeegee, brush or spray.

MATERIAL REQUIREMENTS: One gallon of MasterSeal Concentrate will cover approximately 100 - 120 square feet (11.1 to 13.3 square yards) per coat when properly mixed and applied.

NOTE: Coverage rate may vary due to pavement age, porosity, and method of application.

UNSEALED VS. SEALED

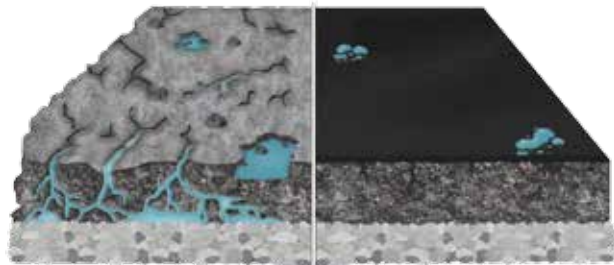

MasterSeal replenishes the binder that is lost through weathering and aging and provides a barrier to moisture intrusion as well as ultraviolet rays, chemicals and salt. MasterSeal beautifies pavement; enhancing the image and curb appeal of commercial properties, home driveways, roadways and more.

PRODUCT #	DESCRIPTION	WEIGHT	PRICE
S1010P	5 - Gallon Pail	52 lbs.	\$ 33.99
S1010D	55 - Gallon Drum	580 lbs.	\$ 310.99
S1010B	Bulk	-	- quoted -