 FORMULATED TO PROTECT & BEAUTIFY ASPHALT PAVEMENT



MASTERSEAL™


ASPHALT BASED PAVEMENT SEALER

THE SMART CHOICE FOR PAVEMENT MAINTENANCE

- Advantages:**
- User friendly - no irritating fumes
 - Deep, rich black color
 - More flexible - won't check crack

- MasterSeal Uses:**
- Parking Lots
 - Driveways
 - Low-Traffic Roads
 - Low-Speed Roads
 - Airports
 - Shopping Malls
 - Highway Shoulders

UNSEALED VS. SEALED

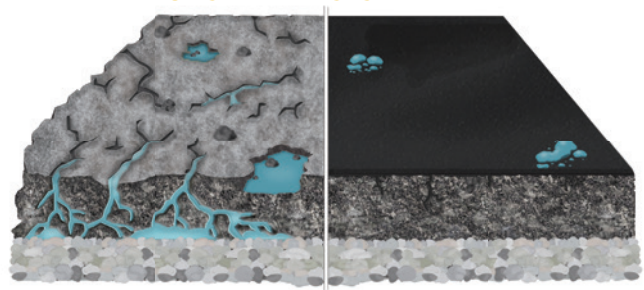

MasterSeal replenishes the binder that is lost through weathering and aging and provides a barrier to moisture intrusion as well as ultraviolet rays, chemicals and salt. MasterSeal beautifies pavement; enhancing the image and curb appeal of commercial properties, home driveways, roadways and more.

MIXING PROCEDURES:
(Based on 100 gallons of MasterSeal Concentrate)

MasterSeal Concentrate..... 100 gallons
 Water 15 - 25 gallons
 Top Tuff Polymer Additive..... 1/2 - 2 gallons
 Sand [40-70 mesh AFS]..... 200-500 lbs.

NOTE: Mix thoroughly in agitated tank and apply by squeegee, brush or spray.

MATERIAL REQUIREMENTS: One gallon of MasterSeal Concentrate will cover approximately 100 - 120 square feet [11.1 to 13.3 square yards] per coat when properly mixed and applied.

NOTE: Coverage rate may vary due to pavement age, porosity, and method of application.

PRODUCT #	DESCRIPTION	WEIGHT	PRICE
S1010P	5 - Gallon Pail	52 lbs.	\$ 32.99
S1010D	55 - Gallon Drum	580 lbs.	\$ 295.99
S1010B	Bulk	-	- quoted -